


This synthetic polyester fiber netting with flexible PVC coating has the required characteristics to be part of safety systems in industrial environments.

Applications:

- Machine guarding
- Conveyor nets
- Debris screening
- Securing concrete structures

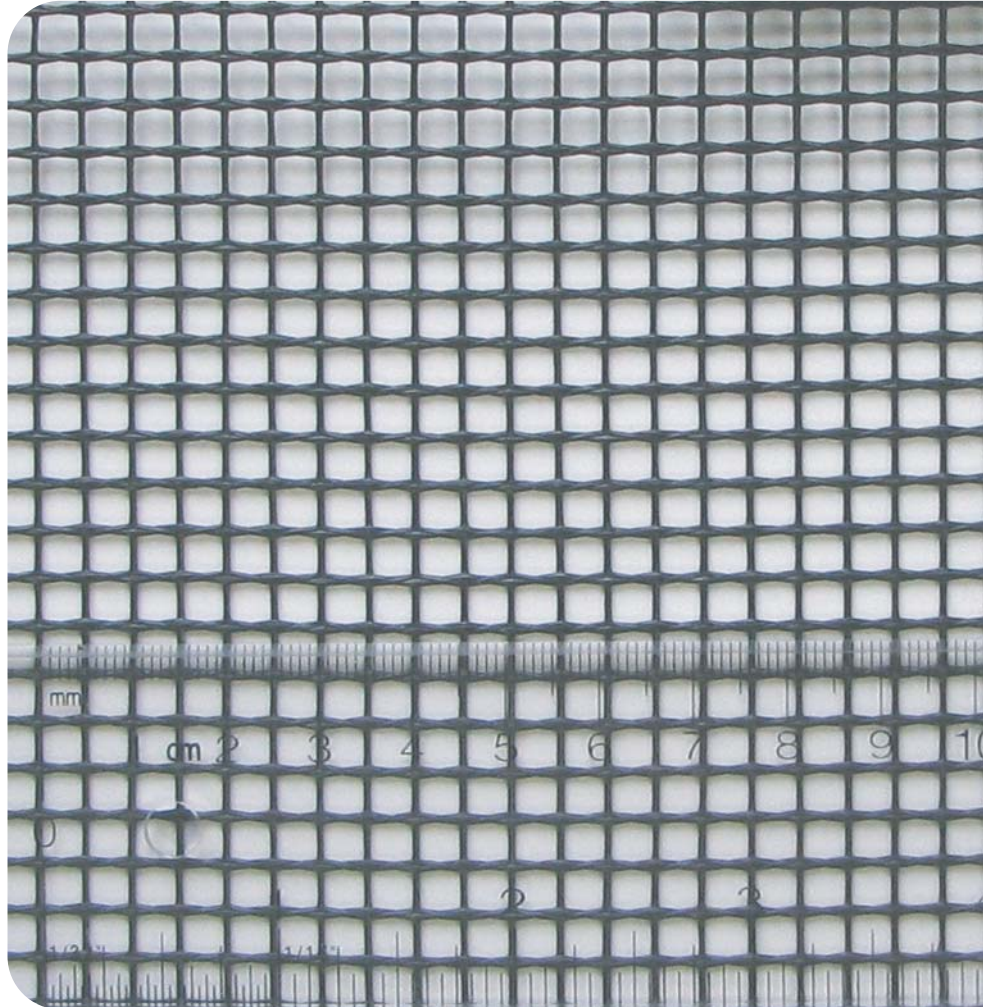

Barry Cordage Ltd.

6110 Grandes Prairies Blvd.

Montréal QC H1P 1A2 CANADA

☎ 514.328.3888 📠 514.328.1963

1.800.305.2673 (Canada/USA)

www.barry.ca

SPECIFICATIONS

- 1300 denier polyester fiber (22%)
- Flexible foamed PVC (78%)
- Flame resistant (NFPA 701 (2004) *Tests 1 and 2 Flammability*)
- UV resistance : slight decoloration at 1000hrs (ASTM G53)
- Breaking strength : 188 lbs (warp), 114 lbs (fill) (ASTM D-1682)
- Colour : black
- Shipped in 5' wide rolls
- Weight : approx. 21 sq.ft./lb (6.5 - 7.5 oz/sq.yd)