


SafeLine™ rope is UL Classified to meet NFPA 1983/2006 edition requirements. Durable 16 carrier construction has a 50/50 ratio of core to sheath for long wear. Solution dyed polyester sheath braided over twisted nylon core strands.

### Features

- Designed to elongate in the event of accidental shock loading and handling
- Easy knotting
- Good strength to weight ratio
- Excellent abrasion resistance
- Not spliceable
- 1/2" and 5/8" are certified to NFPA 1983/2006 edition, General use standard
- 3/8" and 7/16" are certified to NFPA 1983/2006 edition, Light use standard

### Applications

- Fire / rescue use
- High angle rescue
- Technical rigging

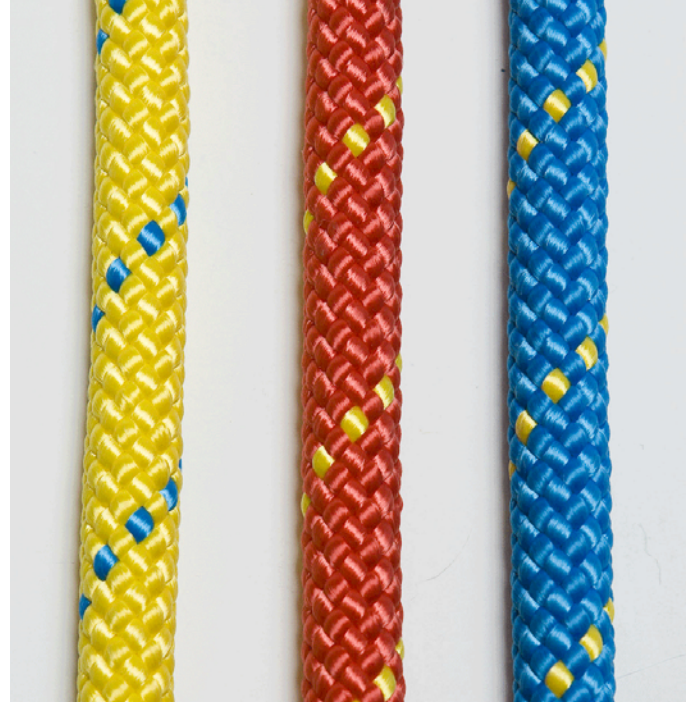

## SPECIFICATIONS

- Standard colours: Blue, Red, Yellow, Orange, Green, Black
- Other colours available upon request

Diameter		kg per	lbs per	Minimum Strength	
(mm)	(in)	100m	100ft	(kg)	(lbs)
9,5	3/8	6,70	4,5	2 753	6 069
11,2	7/16	8,04	5,4	3 059	6 744
13	1/2	11,01	7,4	4 384	9 666
16	5/8	15,77	10,6	5 812	12 813

% Elongation per Diameter			
	300 lbf	600 lbf	1 000 lbf
3/8"	4,3 %	6,7 %	8,9 %
7/16"	2,8 %	5,3 %	7,6 %
1/2"	3,1 %	4,9 %	7,4 %
5/8"	1,8 %	3,3 %	5,0 %

### Barry Cordage Ltd.

6110 boul. des Grandes Prairies  
 Montreal QC H1P 1A2 Canada  
 ☎ 514.328.3888 📠 514.328.1963  
 1.800.305.2673 (Canada / USA)