

O-RINGS



7500



7600




7650



7700
LIGHT WEIGHT



7800*
ULTRA STRENGTH

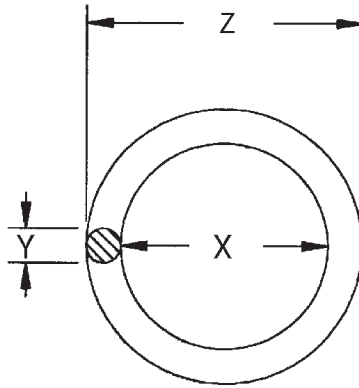

Drop Forged

100% proof loaded to 3,600 lbs (16kN)
Min. tensile strength 5,000 lbs (22.2kN)

Stock	Part #	Description	Material	Weight	X	Y	Z	ANSI Z359.1-2007 std.	CSA Z259.12-01 std.	Box Qty
S	7500	1 1/2" O-Ring	Carbon Steel	2.9oz (82gm)	1 1/2" (38mm)	3/8" (10mm)	2 1/4" (57mm)	Meets or exceeds	Meets or exceeds	100
S	7600	2 5/16" O-Ring	Carbon Steel	4.1oz (116gm)	2 5/16" (59mm)	3/8" (10mm)	3 3/32" (78mm)	Meets or exceeds	Meets or exceeds	100
S	7650	O-Ring	Carbon Steel	4.5oz (127gm)	2 1/2" (64mm)	3/8" (10mm)	3 9/32" (83.5mm)	Meets or exceeds	Meets or exceeds	
S	7700	3 1/8" Light Weight O-Ring	Carbon Steel	5.5oz (155gm)	3 1/8" (80mm)	3/8" (10mm)	3 29/32" (99mm)	Meets or exceeds	Meets or exceed	75
S	7800*	3.0" Ultra Strength O-Ring	Carbon Steel	9.5oz (266gm)	3.0" (76.2mm)	1/2" (12.7mm)	4.0" (102mm)	Meets or exceeds	Meets or exceeds	50

For finishes, refer to page vi.
For mating compatibility, refer to page 6-1.
*Min. tensile strength 10,000 lbs.