

SafeLine™ NFPA Rope


SafeLine™ rope is UL Classified to meet NFPA 1983/2012 edition requirements. Durable 16 carrier construction has a 50/50 ratio of core to sheath for long wear. Solution dyed polyester sheath braided over twisted nylon core strands.

Features

- Designed to elongate in the event of accidental shock loading and handling
- Easy knotting
- Good strength to weight ratio
- Excellent abrasion resistance
- Not spliceable
- 1/2" and 5/8" are certified to NFPA 1983/2012, General use
- 3/8" and 7/16" are certified to NFPA 1983/2012, Technical use

Applications

- Fire rescue
- High angle rescue
- Technical rigging

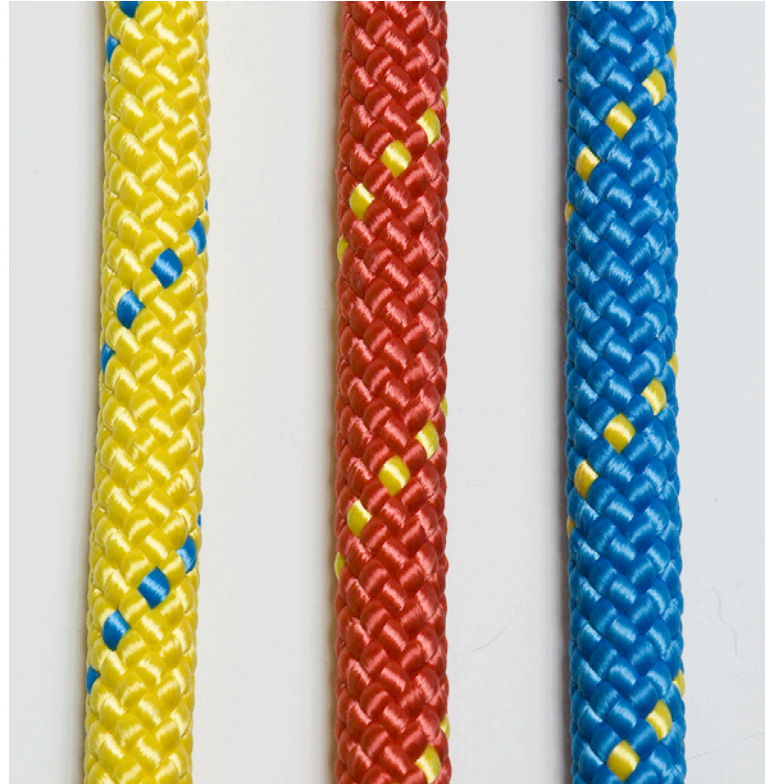

SPECIFICATIONS

- Standard colors: Blue, red, yellow, orange, green
(Other colors available upon request)

Diameter		kg per	lbs per	Minimum Strength	
(mm)	(in)	100m	100'	(kg)	(lbs)
9.5	3/8	6.60	4.87	2 985	6 582
11	7/16	8.00	5.86	3 475	7 663
12.7	1/2	11.2	8.21	4 610	10 164
15.8	5/8	16.4	12.02	5 935	13 085

% Elongation per Diameter

Diameter	300 lbf	600 lbf	1 000 lbf
3/8"	3.3 %	6.1 %	8.4 %
7/16"	2.9 %	5.9 %	8.4 %
1/2"	3.0 %	5.0 %	7.9 %
5/8"	1.4 %	3.1 %	5.2 %

Barry Cordage Ltd.

6110 boul. des Grandes Prairies
Montreal QC H1P 1A2 Canada
☎ 514.328.3888 📠 514.328.1963
1.800.305.2673 (Canada / USA)